



Shower Curtains, Rods and Flanges

250W-8 Oz. White Duck Shower Curtain. A high quality, heavy duty, washable duck, bleached and sanforized shrunk, which shall be bacteriostatic and mildew resistant. Permanent water repellent finish.

250N-Nylon Shower Curtain. An unusually strong, long wearing, quick drying, mildew resistant curtain. Available in washfast colors.

250P-Plastic Shower Curtain. Fabricated of .008 vinyl plastic film. Hems electronically heat sealed. Reinforced eyelets (metal grommets available).


250A-Flame Resistant, Antibacterial, Self-Deodorizing Shower Curtain. This exceptionally durable, high performance fabric is non-toxic and contains a patented, dual agent antimicrobial system. They provide round-the-clock effectiveness against cross-infection hazards by significantly reducing the growth of viable, disease and odor forming organisms on their surfaces.

Note: Color samples are available on request for the 250W, 250N, 250P and 250A shower curtains.

UX168-Shower Curtain Rod Center Support: Support rod is fabricated of type 304 #18 gauge stainless steel. Standard rod lengths are 24" and 36". Other sizes are available upon request. Exposed ceiling flange and rod collar are fabricated of chrome on brass. Will accommodate 1" dia. rods.

UX168A-Same as UX168 except will accommodate 1 1/4" dia. rods.

UX169- Curtain Ring: Ring is constructed of stainless steel, and is fastened to shower curtain around rod. Ring attaches similar to a safty pin. Recommended spacing is 6". Hooks will accommodate 1" or 1 1/4" dia. rods.

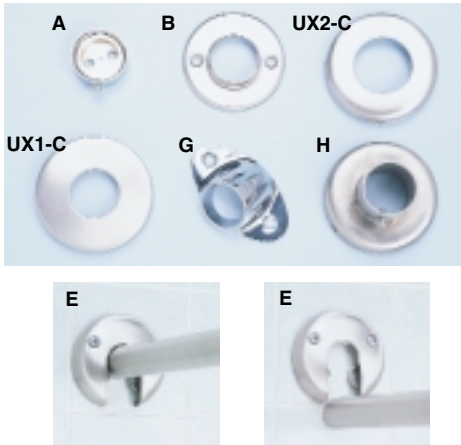

UX1-E 1" o.d. COLLAPSABLE

UNIT	TYPE SERIES	TYPE MOUNTING	O.D.
UX1-A	CHROME ON BRASS	CONCEALED	1"
UX2-A	CHROME ON BRASS	CONCEALED	1 1/4"
UX1-B	STAINLESS STEEL	EXPOSED	1"
UX2-B	STAINLESS STEEL	EXPOSED	1 1/4"
UX1-C	STAINLESS STEEL	CONCEALED	1"
UX2-C	STAINLESS STEEL	CONCEALED	1 1/4"
UX1-E	STAINLESS STEEL	EXPOSED	1"
UX1-F	STAINLESS STEEL	EXPOSED	1"
UX1-G	CHROME ON BRASS	45° ANG.EXP.	1"
UX2-G	CHROME ON BRASS	45° ANG.EXP.	1 1/4"
UX2-H	STAINLESS STEEL	CONCEALED	1 1/4"

Shower Curtain Rods: Rods are fabricated of type 304 #18 gauge stainless steel with a diameter of 1" or 1 1/4" (UX1: 1" Dia., UX2: 1 1/4" Dia.).

UX1-F: Slotted Shower Curtain Rod. 1" dia. stainless steel tubing that is slotted for roller shower curtain hooks, (UX170).




Shower Track & 250M Curtain

250M-Polyester/Mesh Curtain. Flame resistant curtain, 15 lineal yard. Highly durable and resistant to abrasions. Fabric has a high tensile and tear strength. Available in many colors and patterns to coordinate with drapery and bed spreads. Easily launderable up to 160°F. No ironing necessary. (Specific instructions upon request). Curtain has a 100% nylon washable mesh with flame retardant mesh. This mesh has approximately 1/2" openings to allow air flow and water spray where sprinkler systems are used. Standard width of mesh is 21"

***Shower Curtain Tracking:** Tracking system is fabricated of satin finish extruded aluminum. Track can be wall mounted, ceiling mounted or suspended hanger assembly.

UX62N-Nylon Carriers. Nickel plated brass bead chain and hook assembly for aluminum shower curtain tracking system.

NOTE: When ordering track system other than a straight design, a drawing must be supplied with degree of bends and overall lengths.

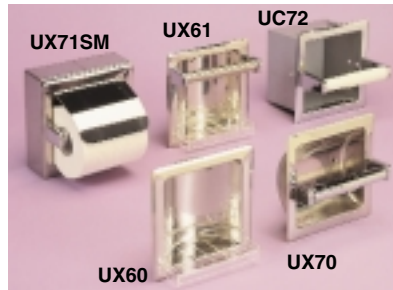

Description	Chrome on Brass	Sat. Fin. S/S	Chrome on Zamac
Recessed Soap Holder	UB60	UX60	UC60
Recessed Soap Holder and Grab Bar with Plastic Insert	UB61	UX61	UC61
Recessed Toilet Tissue Holder	UB70	UX70	UC70
Recessed Toilet Tissue Holder with Hood	—	UX71	—

OVERALL SIZE: 6 1/4"W x 6 1/4"H

***NOTE:** UX71 available in surface mounted style. (Ex. UX71SM)

UC72-Recessed Hide a Roll Toilet Tissue Dispenser.

Fabricated of chrome on Zamac with an area to store a spare roll of toilet tissue.

Overall Size: 6 1/8"W x 6 1/8"H x 6 1/8"D

Wall Opening: 5 3/8"W x 5 3/8"H x 4"D

UX75-Recessed Double Roll Toilet Tissue Dispenser. Unit is fabricated of polished stainless steel with chrome plated plastic rollers.

Overall Size: 12 3/8"W x 6 1/4"H

Wall Opening: 11 3/4"W x 5 1/4"H x 2"D

UX76-Same as UX75 only hooded

***UX75 & UX76 are also available in surface mounting.**

U007-Theft Resistant Adapter. Available on all recessed toilet paper dispensers (UX, UB, UC).



UX75

UX76

UB Series


Recessed chrome on brass accessories are fabricated of chrome plated brass shell with chrome over nickel and copper finish. Entire surface is polished to a high luster finish.

UX Series

Recessed stainless steel accessories are fabricated of type #304 stainless steel, one piece construction on entire shell with a polished finish on all exposed surfaces. Flanges are heavy duty chrome plated castings finished to match stainless steel shell.

UC Series

Recessed Chrome on Zamac accessories are Zamac trim plated with high luster nickel and chrome. Metal posts to be die cast Zamac.

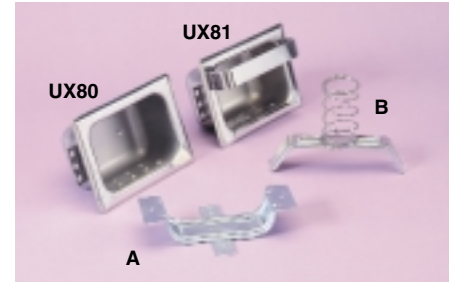

UX80-Recessed Heavy Duty Stainless Steel Soap Dish: Fabricated of #18 gauge stainless steel drawn one piece construction. Unit has raised areas for air flow.

OPTIONS

UX80M-Recessed soap dish with #18 gauge stainless steel extended lip.

UX80-A-Recessed soap dish with two center holes drilled for securing to "A" clamp.

UX80M-A-Recessed soap dish with extended lip and "A" clamp.

OVERALL SIZE: 7 1/8"W x 5"H x 2 3/4"D

WALL OPENING: 5 5/8"W x 3 3/4"H x 3"D

UX81-Same as UX80 except unit is equipped with grab bar.

OPTIONS


UX81M-Recessed soap dish and grab bar with #18 gauge stainless steel extended lip.

UX81-A-Recessed soap dish and grab bar with two center holes drilled for mounting to "A" clamp.

UX81M-A-Recessed soap dish and grab bar with extended lip and "A" clamp.

OVERALL SIZE: 7 1/8"W x 5"H x 4"D

WALL OPENING: 5 5/8"W x 3 3/4"H x 3"D

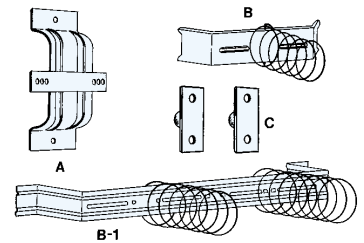

Recessed Installation Aids

All recessed items are regularly furnished with wood screws for standard installations. The following aids are available for special installations:

A. Screw Type Installations. Applicable where backing or framing is not available. Used for existing walls.

B. Conventional Type Installations. Clamp is secured to back side of front wall.

B-1. Same as "B" clamp except used on dual recessed units (UX75, UX76).

C. Tile Type Installations. For cement, mortar or mud-in installations.



U007

U007-Theft Resistant Adapter. Available on all recessed toilet paper dispensers (UX, UB, UC).